



您的選擇是
一台機器 或是
一家擁有專業研發設計能力的合作夥伴

BARLOAD
巴洛德

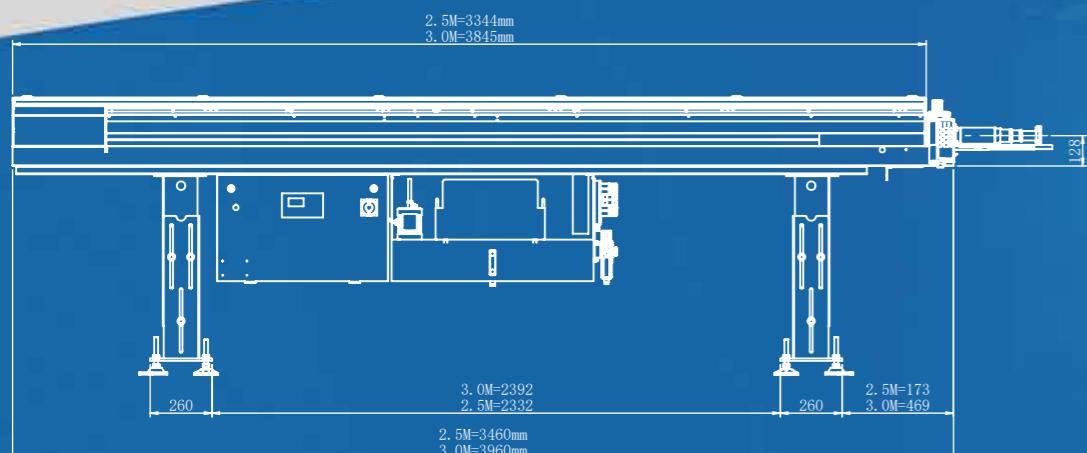

規格如有更改，恕不另行通知。The spec is subject to change without prior notice.

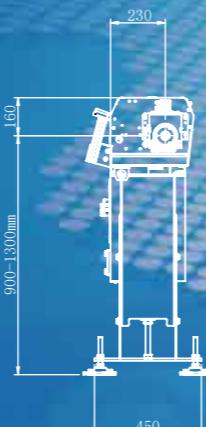

富豪機電

BARLOAD
巴洛德

昆山巴洛德机器人有限公司

江苏省昆山市玉山镇环庆路2588号B区3栋一楼
原创企业基地B区
TEL:0512-36688366 FAX:0512-36685958

东莞市富粤机械有限公司

广东省东莞市长安镇乌沙社区步步高大道124号
一本工业园D栋103
TEL:0769-85390996 FAX: 0769-85390997

台灣富豪機電股份有限公司

50080台灣彰化市石牌里維新路138號
TEL:+886-4-7384895 FAX:+886-4-7320282
[Http://www.barload.com](http://www.barload.com)

CTG 系列

台灣富豪機電股份有限公司

TAIWAN BARLOAD MACHINE CO., LTD.

LED远程监控系统：(专利)

LED灯光视觉功能（使用者可远距离监控厂区机台运行情况）：
加工中棒材的长度、材料替换显示、送料机异常警示、车床异常警示等相关信息，皆可由LED灯光闪烁变化来轻松辨识，方便厂区机台运行管理。

LED Remote monitoring system:(patents)

LED lighting visual function (user can monitor the operation of the machine in the factory):
The length of the bar in the processing, the material replacement display, the abnormal warning of the barfeeder, the abnormal warning of the lathe, and other related information can be easily identified by the flashing LED light, which is convenient for the operation and management of the machine in the factory.



(示意图)

产品应用：

BARLOAD全系列送料机采用智能PLC控制器 + LED远程监控系统，高效能的通讯接口软件编程设计，可搭配任何品牌的数控车床，质量稳定、性价比高。

Production Applications:

The BARLOAD full range of barfeeders adopts the PLC controller + LED remote monitoring system, high-performance communication interface software programming design, can be compatible with any brand of CNC lathes, which is stable quality and cost-effective.



插拔料机构：

CTG系列：采用气缸驱动插拔料搭配摇臂型夹料机构，料夹与材料的插入和分离，动作确实，有效降低材料插入及拔出的故障停机。

Insert-and-retract mechanism :

CTG series: The cylinder drive inserting material is matched with the clamping device, and the insertion and separation of the finger chuck and the material are really executed, effectively reducing the failure of material insertion and extraction.



机身结构升级：

CTG系列产品为因应26型车床需求趋势,全面提升结构刚性强度,以符合26型车床加工时对送料机刚性强度防震的性能要求,有效提升送料机的效能。

Mechanical Evolution:

CTG series remodels totally to enhance the mechanical constructions especially on potential vibration issue to meet the requirements of bar materials sizing under 26mm in OD due to strong demands of 26mm- turning solutions.



规格表 Specifications						
系列	SERIES	CTG (油膜缩短型)				
机型	MODEL	12	16	20	23	26
送料向别	FEEDING DIRECTION	右向 RIGHT / 左向 LEFT				
规格	SPECIFICATIONS	2.5 M / 3.0 M				
棒材直径	BAR DIAMETER	3 - 12 mm	3 - 16 mm	3 - 20 mm	3 - 23 mm	5 - 26 mm
		部分棒材规格需进行前端面修料倒角以达最佳效果				
棒材容量	BAR CAPACITY	10mm (3/8) / 22 pcs				
棒材长度	BAR LENGTH	2.5M : 2600 mm / 3.0M : 3100mm				
机械总重	MACHINE WEIGHT	2.5M : 368 KG / 3.0M : 390KG				
空气系统	AIR PRESSURE	6 kgf / cm ² ; 70psl				
传动系统	TRANSMISSION	SERVO MOTOR 伺服马达				
油箱容量	OIL TANK CAPACITY	30 L				
消耗功率	POWER CONSUMPTION	630 W				
电源供应	POWER SUPPLY	3P 220V 50 / 60HZ				
		车床加工转速要求 8000rpm 以上需选购高转速用中轴料夹				

本公司不断研发创新
设计规格如变更
恕不另行通知

Design and specifications
are subject to change
without prior notice .